

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 405 580 A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 90112460.2

(51) Int. Cl.⁵: **C03B 37/012**

(22) Date of filing: 29.06.90

(30) Priority: 29.06.89 JP 167695/89

(43) Date of publication of application:
02.01.91 Bulletin 91/01(84) Designated Contracting States:
DE DK ES FR GB IT SE(71) Applicant: **SUMITOMO ELECTRIC INDUSTRIES, LTD.**
5-33, Kitahama 4-chome, Chuo-ku
Osaka-shi, Osaka 541(JP)(72) Inventor: **Ishikawa, Shinji, C/o Yokohama Work**
Sumitomo Electric Ind., Ltd., 1, Taya-cho Sakae-ku
Yokohama-shi, Kanagawa-ken(JP)
Inventor: **Ohga, Yuichi, C/o Yokohama Work**
Sumitomo Electric Ind., Ltd., 1, Taya-cho Sakae-ku
Yokohama-shi, Kanagawa-ken(JP)
Inventor: **Tsuchiya, Ichiro, c/o Yokohama Work****Sumitomo Electric Ind., Ltd., 1, Taya-cho Sakae-ku****Yokohama-shi, Kanagawa-ken(JP)**
Inventor: **Kanamori, Hiroo, C/o Yokohama Work****Sumitomo Electric Ind., Ltd., 1, Taya-cho Sakae-ku****Yokohama-shi, Kanagawa-ken(JP)**
Inventor: **Yokota, Hiroshi, C/o Yokohama Work**
Sumitomo Electric Ind., Ltd., 1, Taya-cho Sakae-ku**Yokohama-shi, Kanagawa-ken(JP)**
Inventor: **Kyoto, Michihisa, C/o Yokohama Work****Sumitomo Electric Ind., Ltd., 1, Taya-cho Sakae-ku****Yokohama-shi, Kanagawa-ken(JP)**(74) Representative: **Hansen, Bernd, Dr.**
Dipl.-Chem. et al
Hoffmann, Eitle & Partner Patent- und Rechtsanwälte Arabellastrasse 4e 4
D-8000 München 81(DE)(54) **Process for thermal treatment of glass fiber preform.**

(57) The present invention provides

a process for the dehydrating and purifying treatment by heating a porous glass preform for an optical fiber comprising passing the porous glass preform through a muffle tube having a SiC layer at least on its inner surface at a high temperature under an atmosphere comprising an inert gas and a silicon halogenide gas;

a process for the fluorine-doping treatment by heating a porous glass preform for an optical fiber comprising passing a porous glass preform through a muffle tube having a SiC layer at least on its inner surface at a high temperature under an atmosphere comprising a fluorine compound gas and an inert gas; and

a process for the vitrifying treatment by heating a porous glass preform for an optical fiber comprising passing the preform, which has been previously dehydrated and purified, through a muffle tube having a SiC layer at least on its inner surface at a high temperature under an atmosphere gas.

EP 0 405 580 A2

PROCESS FOR THERMAL TREATMENT OF GLASS FIBER PREFORM

BACKGROUND OF THE INVENTIONField of the Invention

5 The present invention relates to a process for the thermal treatment of a porous glass preform for the production of an optical fiber preform.

10 Description of the Related Art

A preform for an optical fiber is generally produced by forming a cylindrical or an annular porous preform by the Vapor Phase Axial Deposition method or the Outside Chemical Vapor Deposition method and heating, dehydrating and sintering the porous preform in a heating furnace under an atmosphere of an
15 inert gas such as argon or helium, a chlorine based gas or a fluorine based gas to produce a transparent and highly pure preform for the optical fiber.

An operating temperature of the furnace depends on a kind of a dopant to be doped and a content of the dopant in the preform, and it is generally in the range of 1200 to 1600 °C. Since impurities tend to contaminate in the preform at such high temperature, a muffle tube made of a high purity quartz is typically
20 used in the furnace to prevent the contamination. However, the quartz made muffle tube tends to rapidly get brittle due to devitrification, that is, transition from a glass phase to a crystal phase at a high temperature, and thus it is poor in durability.

Recently, a carbon made muffle tube an inner surface of which is coated with silicon carbide (SiC) is often used in a heating furnace. The carbon made muffle tube can be operated at a higher temperature than
25 the quartz made one and SiC improves a gas impermeability and oxidation resistance of the muffle tube.

Further, in order to prevent a reaction between SiC and a reactive gas, the SiC coating on the carbon made muffle tube is treated with oxygen to form a SiO₂ layer on the SiC coating (see Japanese Patent Kokai Publication No. 201634/1986).

The prior arts as described above have following problems:

- 30 (1) When the quartz made muffle tube is used, it is softened and deformed at a temperature above 1400 °C. In addition, the temperature of the muffle tube cannot be lowered to a temperature below a crystal transition point (lower than 300 °C) because of crystal (cristobalite) formation at a temperature above 1200 °C. Thus, once the muffle tube is heated, it should be used continuously without lowering the temperature thereof.
- 35 (2) When a SiC made or SiC coated muffle tube is used, SiC reacts with a halogen based gas as a reactant to form a porous carbon, whereby the muffle tube becomes poor in gas tightness so that the halogen based gas leaks outside from the muffle tube.
- (3) In the case where the muffle tube having the SiO₂ layer on the SiC coating is used, thermal expansion coefficients of SiC and SiO₂ are greatly different from each other and thereby the SiO₂ layer
40 in a thickness in the order of some microns tends to crack. Then, a gas permeates through the crack and it is impossible to stably produce the preform for a long period.

SUMMARY OF THE INVENTION

45 It is an object of the present invention to provide a process of the thermal treatment for the stable production of an optical fiber preform for a long period from which preform an optical fiber having a low transmission loss can be drawn.

The present invention provides a process of the thermal treatment of a porous glass preform for an
50 optical fiber comprising heating the preform in a heating apparatus which comprises a muffle tube having a SiC coating at least on an inner surface thereof in an atmosphere for effecting the thermal treatment.

The term "thermal treatment" is intended to mean any treatment in which the preform is heated. For example, a sintering treatment, a dehydrating and purifying treatment, a fluorine-doping treatment and a vitrifying treatment of the preform are included in such thermal treatment.

In a first aspect, the present invention provides a process for the dehydrating and purifying treatment

by heating a porous glass preform for an optical fiber comprising supporting or passing the preform in or through a muffle tube having a SiC layer at least on its inner surface at a high temperature under an atmosphere comprising an inert gas and a silicon halogenide gas or an atmosphere comprising an inert gas, a silicon halogenide gas and a halogen based gas.

5 In a second aspect, the present invention provides a process for the fluorine-doping treatment by heating a porous glass preform for an optical fiber comprising supporting or passing the preform in or through a muffle tube having a SiC layer at least on its inner surface at a high temperature under an atmosphere comprising a fluorine compound gas and an inert gas.

10

BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1 to 4 and 7 each schematically shows a sectional view of an heating furnace in which the present invention is carried out,

15 Fig. 5 schematically shows an apparatus for measuring an oxygen concentration in a muffle tube,

Fig. 6 shows results of oxygen measurements in one muffle tube with the measuring apparatus of Fig. 5, and

Fig. 8 shows a transmission loss of an optical fibers produced in Example 1 and Comparative Example 2.

20 DETAILED DESCRIPTION OF THE DRAWINGS

The present invention will be described in detail with reference to the accompanying drawings.

Now, the first aspect of the present invention is explained.

Fig. 1 schematically shows a sectional view of one embodiment of a heating apparatus in which the process of the present invention is carried out. The apparatus comprises a muffle tube 12 in which a porous glass preform 11 is inserted and a furnace body 15 around the muffle tube 12 comprising a heater 13 to heat the glass preform 11 and an insulation 14 to prevent heat loss. A dehydrating and purifying gas used for dehydrating and purifying the preform is supplied through a line 16 connected with the muffle tube. In addition, a silicon halogenide gas generated in a bubbler 17 is mixed with the other dehydrating and purifying gas G in a gas mixer 18. The muffle tube is made of carbon and coated with a SiC layer. Further, the SiC layer is coated with a SiO₂ layer. Each layer can be formed in a conventional manner.

The term "dehydrating and purifying gas" is intended to mean a gas mixture of an inert gas such as helium (He), Argon (Ar) and nitrogen (N₂) with a silicon halogenide gas and optionally a halogen based gas.

The present invention has been conceived on the basis of the following experiments:

35

Experiment 1

A carbon made plate coated with SiC in a thickness of 100 μm was heated at 1500 °C under an atmosphere of the dehydrating and purifying gas containing 2.5 parts by volume of SiCl₄ relative to 100 parts by volume of the inert gas (He) for 10 hours.

After heating, a weight loss of the SiC coating was determined to be as small as 1 %. A specific surface area of the SiC coating was 0.1 m²/g, which was substantially equal to that of the SiC coating before heating.

45

Experiment 2

Experiment 1 was repeated except that the dehydrating and purifying gas contained 3 parts by volume of SiCl₄ and 1 part by volume of Cl₂ each relative to 100 parts by volume of the inert gas.

After heating, the weight loss of the SiC coating was determined to be as small as 1.4 %. The specific surface area of the SiC coating was 0.15 m²/g, which was substantially equal to that of the SiC coating before heating.

55

Experiment 3

Experiment 1 was repeated except that the dehydrating and purifying gas contained 5 parts by volume

of Cl_2 relative to 100 parts by volume of the inert gas.


After heating, the weight loss of the SiC coating was determined to be as large as 71 %. This means that SiC was completely decomposed. The specific surface area of SiC was $800 \text{ m}^2/\text{g}$ and large pores having a diameter of 30 \AA were found.

From the above Experiments, the following results can be induced:

(1) At a high temperature, SiC reacts with Cl_2 and does hardly with SiCl_4 .

(2) The reaction between SiC and Cl_2 can be suppressed when SiCl_4 is added to Cl_2 in the dehydrating and purifying gas.

Thus, in order to prevent the degradation of the SiC coating due to Cl_2 , the dehydrating and purifying treatment is preferably carried out under an atmosphere of SiCl_4 or an atmosphere of Cl_2 mixed with SiCl_4 . Those considerations can be expressed according to the following equilibrium equation:



The above equation indicates the degradation of SiC by Cl_2 . Therefore, in order to suppress the degradation, a concentration of the product SiCl_4 is increased on the basis of an equilibrium relation expressed by an equilibrium constant $K_p = [\text{C}_{\text{SiCl}_4}]^{1/2} / [\text{Cl}_2]$.

When a gas mixture of the inert gas and the silicon halogenide gas is used as the dehydrating and purifying gas, 0.3 to 10 parts, preferably 2 to 5 parts by volume of the halogenated gas is used relative to 100 parts by volume of the inert gas. When a ratio of the silicon halogenide gas is less than 0.3 parts by volume, a dehydrating ability of the gas mixture is insufficient. When it is more than 10 parts by volume, increase of the effect due to addition of such amount of SiCl_4 is not so remarkable.

When a gas mixture of the inert gas, the silicon halogenide and the halogen based gas is used as the dehydrating and purifying gas, 0.3 to 10 parts by volume of the silicon halogenide gas and 0.1 to 10 parts by volume of the halogen based gas are preferably used relative to 100 parts by volume of the inert gas. When the halogen based gas is contained more than 10 parts by volume, the SiC coating is degraded. When it is less than 0.1 part by volume, no effect of adding the halogen based gas is achieved. In any event, the addition of the halogen based gas further increases the dehydrating ability of the gas mixture.

A heating temperature at which the dehydrating and purifying treatment can be effectively carried out is in the range of 900 to 1200°C . When the heating temperature is lower than 900°C , the dehydration and purification are insufficient. When it is higher than 1200°C , the porous glass preform contracts whereby diffusion of the dehydrating and purifying gas into the preform inside and volatilization of impurities to be removed from the preform inside are suppressed.

In an alternative manner to prevent the degradation of SiC in the presence of the halogen based gas contained in the dehydrating and purifying gas, the porous glass preform is dehydrated and purified in a heating furnace having a quartz made muffle tube firstly, and then heated in the muffle tube coated with SiC. The quartz made muffle tube is not degraded by the halogen based gas such as Cl_2 , but the temperature thereof cannot be lowered since crystallization happens at a temperature above 1200°C as described above. In order to avoid the crystallization, the dehydrating and purifying treatment in the quartz made muffle tube is preferably performed at a temperature lower than 1100°C .

Next, the second aspect of the present invention is explained.

In a second aspect, the preform is preferably heated at a temperature of not higher than 1400°C . A silicon fluoride such as SiF_4 , a carbon fluoride such as CF_4 or SF_6 can be used as the fluorine compound gas.

In the case where the porous glass preform does not vitrified by the fluorine doping treatment at a temperature not higher than 1400°C , the preform is again treated for vitrification at a temperature above 1400°C under an atmosphere of only the inert gas, or the preform is vitrified while it is fluorine-doped under an atmosphere containing SiF_4 together with at least one of Si_2F_6 and Si_3F_8 at a temperature above 1400°C . In this way, the fluorine-doping treatment can be performed by using the SiC coated muffle tube without the degradation of the SiC layer.

Basic experiments and considerations to create the second aspect of the present invention will be hereinafter described in detail.

Experiment 4

A sintered SiC article having a diameter of 5 mm was heated at a temperature of 1450°C under an atmosphere of SiF_4 gas. After 10 hour heating, a weight loss of the SiC article was 2.4% . When other fluorine compound gas was used instead of SiF_4 , the weight loss was almost the same as in SiF_4 .

Experiment 5

A sintered SiC article having the same size as in Experiment 4 was heated at a temperature of 1400 °C under an atmosphere of SiF₄ gas. After 50 hour heating, no weight loss of the SiC object was measured.

5 When other fluorine gas was used instead of SiF₄, the same results as with SiF₄ were obtained.

Experiment 6

10 A sintered SiC article having the same size as in Experiment 4 was heated at a temperature of 1500 °C under an atmosphere of 91 % by volume of SiF₄ and 9 % by volume of Si₂F₆ for 50 hours, and no weight loss was determined.

Experiment 7

Experiment 6 was repeated except that the heating temperature was 1650 °C. The article was heated for 10 hours and the weight loss thereof was 3%.

20

Experiment 8

Experiment 7 was repeated except that the gas contained 85 % by volume of SiF₄, 10 % by volume of Si₂F₆ and 5 % by volume of Si₃F₈ was used. After 10 hour heating, no weight loss was determined.

25 In addition, it has been found that Si adheres to a low temperature portion of the muffle tube when the weight loss of the SiC article was observed.

From the results of the above Experiments 4 to 8, the following can be understood.


(1) SiC reacts with the fluorine compound gas at a temperature above 1400 °C. However, by adding Si₂F₆ as a reactant gas to SiF₄, the reaction is suppressed.

30 (2) The gas mixture of SiF₄ and Si₂F₆ reacts with SiC at a further high temperature, but it does not react when Si₃F₈ is added to the gas mixture.

(3) The produced material through the reaction between SiC and Si_iF_x is Si in the low temperature portion.

35 As a result, the reaction of SiC and the fluorine compound gas is suppressed at a temperature below 1400 °C. Even at a temperature higher than 1400 °C, the reaction of SiC with SiF₄ is suppressed by addition of Si₂F₆ and/or Si₃F₈. Thus, guidelines on preventing the degradation of SiC are indicated.

The above results can be explained as follows. The degradation reaction of SiC is expressed according to the following reaction equations:



Free energy changes ΔG in reactions of the above equations (2) and (3) are positive up to 1800 °C and reactions hardly proceed to the right hand side of the equations. However, in a gas flowing system as in a muffle tube of an electrical heating furnace, each equilibrium is shifted and the reaction proceeds to the left hand side a little. Therefore, the SiC coating is degraded a little. When the gas such as the reaction products SiF₃^{*} and/or SiF₂^{*} are added to the reaction system, the reaction equilibrium is kept and the degradation of the SiC coating is suppressed.

Si₂F₆ or Si₃F₈ forms SiF₃^{*} or SiF₂^{*} at a high temperature according to the following equations:



50 The products SiF₃^{*} and SiF₂^{*} suppress the reactions (2) and (3).

The muffle tube preferably used in the present process has an inner layer made of a highly pure silicon carbide or has an inner and an outer layers each made of the highly pure silicon carbide.

The highly pure silicon carbide used for the muffle tube has preferably a purity of not less than 99.999 % and preferably contains iron of not more than some ppm and copper of not more than 1 ppm.

55 The muffle tube in the heating furnace used in the present invention has the highly pure silicon carbide layer as its inner layer or as its inner and outer layers. The silicon carbide layer is preferably formed by a coating method with vapor phase reaction (CVD method) such as plasma CVD (PCVD) coating method or chemical CVD coating method since a highly pure and dense coating can be formed by such method.

A thickness of the highly pure silicon carbide coating can be selected depending on the operation temperature of the muffle tube and the atmosphere in the muffle tube. Generally, the coating has a thickness of at least 1 μm , preferably at least 5 μm , more preferably at least 25 μm , for example 50 μm .

Carbon, alumina or SiC sintered material can be exemplified as a material for the muffle tube substrate.

- 5 The carbon material, especially a highly pure carbon material is preferred.

In the case where the highly pure carbon is used for the muffle tube substrate, the impurity of the carbon expressed as a total ash content is not more than 50 ppm, preferably not more than 20 ppm. For example, when the carbon has the ash content of more than 1000 ppm, it cannot be used for making the muffle tube substrate in view of the impurities such as iron and copper. The impurities and their amounts contained in the carbon having the total ash content of not more than 20 ppm are shown in the following Table:

Table 1

B < 0.1 ppm	Ca < 0.1 ppm
Mg < 0.1 ppm	Ti < 0.1 ppm
Al < 0.1 ppm	V < 0.1 ppm
Si < 0.8 ppm	Cr < 0.1 ppm
P < 0.2 ppm	Fe < 0.1 ppm
S < 0.1 ppm	Cu < 0.1 ppm
Ni < 0.1 ppm	

Fig. 2 schematically shows a sectional view of a heating furnace with which the present process is performed. In Fig. 2, the reference number 21 indicates a porous glass preform, 22 does a supporting rod for the preform, 23 does a muffle tube, 24 does a heater, 25 does a furnace body, 26 does an inlet for introducing an inert gas inside the furnace body and 27 does an inlet for introducing an atmosphere gas (for example, SF_6 , helium and so on) into the muffle tube. The reference number 231 indicates a muffle tube substrate made of carbon, 232 does a coating layer of the highly pure silicon carbide. In the embodiment as shown in Fig. 2, the coatings of the highly pure silicon carbide are present as an inside layer and an outside layer of the muffle tube 23.

Fig. 3 schematically shows a sectional view of a heating furnace for the optical fiber preform which is also used in accordance with the present invention. In the embodiment shown in Fig. 3, is used a member 31 which is made of a heat resistant material having a small gas permeability such as a ceramic or a metal material and in which a muffle tube 23 is inserted in order to prevent penetration of a contaminant into the muffle tube through a wall thereof. At least an inner surface of the muffle tube 23 is coated with the highly pure carbon (not shown).

A material used for the member 31 is preferably the ceramic or the metal material having a nitrogen permeability in the order of 10^{-6} cm^2/sec . or less. Examples of the ceramic material are, in addition to silicon carbide, quartz glass, Al_2O_3 , BN and so on.

45 In another embodiment of an heating furnace which is used in the present invention, a muffle tube comprises an upper portion, a middle portion and a lower portion which are detachably connected each other. At least the middle portion is made of the highly pure carbon, and the upper and the lower portion are made of a heat and corrosion resistant material.

One example of the above embodiment is schematically shown in Fig. 4. A heater 24 is located inside a heating furnace body 25. A muffle tube 23 comprises an upper portion 434, a middle portion 435 and a lower portion 436 and they are detachably connected each other by, for example, screwing. At least an inner surface of the middle portion 435 is coated with a layer 432 made of the highly pure silicon carbide. Since the upper portion 434 and the lower portion 436 are not subjected to so high temperature as in the middle portion 435, they are not necessarily made of such highly pure material as in the middle portion 435, but they only need to have the gas impermeabilities. Thus, although the upper and the lower portions are shown to have the layers 432 made of the highly pure silicon carbide as shown in Fig. 4, the layers are preferably made of a usual silicon carbide material from a view point of economy which does not have such high purity as the silicon carbide material as described above. For example, a silicon carbide material

having a purity of 99.9 % is satisfactory. In addition, since the upper and lower portions are heated at a temperature not higher than 1000 °C, they may be made of a quartz material which is not resistant to a fluorine based gas. Even in such case, the contents of copper and iron, especially copper content should be taken into account and they are preferably not more than 0.1 ppm.

The muffle tube having the middle portion at least the inner surface of which is coated with the highly pure silicon carbide is suitably used in the present invention since it does not react with the halogen based gas such as SiF_4 , Si_2F_6 , CF_4 and C_2F_6 , and it is highly heat resistant.

In the case where the heating furnace as shown in Fig. 2, 3 or 4 is used, a large amount of air around the muffle tube (or environmental operation atmosphere) penetrates into the muffle tube, when the glass preform is inserted in or removed from the muffle tube.

Fig. 5 schematically shows an apparatus which measures an amount of air inflow into a muffle tube comprising the muffle tube 51, an inlet 52 for introducing a purging gas, a sampling tube 53 for a gas in the muffle tube, a device 54 which measures an oxygen concentration in the gas and a pump 55. An inner diameter of the muffle tube 51 is 150 mm and a tip portion of the sampling tube is located at a position by 1 m from an opening of the muffle tube.

Results of the oxygen concentration measurement carried out with respect to one embodiment with the above measuring device are shown in a graph in Fig. 6. As understood from the graph, the air around the muffle tube penetrates into the muffle tube and it is impossible to prevent the inflow of the air even when an amount of the purging nitrogen is increased.

The inflow of the air causes problems as follows: Firstly, inside of the muffle tube is contaminated with dusts in the air. The dusts comprises SiO_2 , Al_2O_3 , Na_2O , Fe_2O_3 and so on. Among them, Al_2O_3 and Na_2O cause devitrification of the preform, and Fe_2O_3 causes increase of a transmission loss.

Such inflow of the air is prevented in an additional embodiment of the heating furnace in which the present invention is performed. The heating furnace comprises a heater, a muffle tube and a front chamber which previously or subsequently accommodates the glass preform before or after a thermal treatment of the preform, and from or in which the preform is inserted in or removed from the muffle tube.

Fig. 7 schematically shows a heating furnace which is the same as that shown in Fig. 4 except that it comprises the front chamber 71. When the furnace is used, the glass preform 21 to be thermally treated is inserted in the front chamber 71 and a top cover (not shown) of the front chamber is closed. Then, nitrogen is supplied in the front chamber which is separated from the muffle tube 23 with a partition means 76 for nitrogen replacement. The partition means 76 is opened, the porous glass preform is inserted in the muffle tube 23 of which inside atmosphere has been previously replaced with a desired atmosphere gas, the partition means is closed and then the thermal treatment is initiated. After the thermal treatment, the partition means is opened, the partition means is closed after the glass preform is lifted from the muffle tube into the front chamber, and then the glass preform is removed from the front chamber after opening the top cover.

The front chamber is preferably constructed so that it can be evacuated to a pressure of 10^{-2} Torr and be heated to a temperature of 800 °C. The front chamber is preferably made of a material which is heat resistant and which does not liberate any contaminant. For example, quartz glass, SiC , Si_3N_4 or BN is preferred for making the front chamber. The material of the chamber may be the same as or different from that of the muffle tube.

When the front chamber is evacuated, for example a rotary pump may be used. In order to prevent a back flow of a pump oil, a trap cooled with liquid nitrogen may be located between the front chamber and the pump. A rotary installing mechanism having a magnetic seal is disposed at the top of the front chamber.

EXAMPLES

The present invention will be further described with the following examples.

Example 1

A heating furnace comprising a muffle tube 23 having a SiC coating 232 in a thickness of 50 μm as shown in Fig. 2 was used. A porous glass preform 21 was inserted in the muffle tube at a temperature of 1100 °C. 5 l/min. of He and 300 cc/min. of SiCl_4 were supplied in the muffle tube as the dehydrating and purifying gas. The preform was lowered and passed along a side portion of a heater 24 through the muffle tube at a lowering rate of 5 mm/min. and thereby the preform was dehydrated. Subsequently, the

temperature of the furnace was raised to 1650 °C and the preform was again passed along the side portion of the heater at a rate of 2 mm/min. while supplying He at 5 l/min., whereby the preform was vitrified.

An optical fiber was drawn from the glass preform obtained by the above treatment. A residual water content in the optical fiber was less than 10 ppb to show that substantially no water was present in the optical fiber. A transmission loss was measured and the results thereof showed no absorption increase of the optical fiber due to a transition metal such as Fe, Cu, Cr or Ni (see Fig. 8, curve I).

The above treatment was carried out to vitrify thirty preforms. After the thirtieth treatment, a surface of the muffle tube was observed. No degradation of the SiC coating was observed.

Example 2

Example 1 was repeated except that a gas mixture consisting of 5 l/min. of He, 200 cc/min. of SiCl₄ and 50 cc/min. of Cl₂ was used as the dehydrating and purifying gas.

The surface of the muffle tube was observed after treating thirty preforms. No degradation of the SiC coating was observed as in Example 1.

Comparative Example 1

Example 1 was repeated except that 5 l/min. of He and 200 cc/min. of Cl₂ were supplied as the dehydrating and purifying gas.

The treatment was carried out on ten preforms and an optical fiber was drawn from each preform. The water content of each optical fiber was determined and was as large as 0.2 to 1 ppm in the optical fibers drawn from the third to tenth preforms. The wavelength transmission loss characteristic of each optical fiber was measured and showed not only an absorption peak due to OH at 1.4 μm but also an absorption peak of 3 to 10 dB/km due to Cu²⁺ at 0.85 μm (see Fig. 8, Curve II).

The surface of the muffle tube was observed after the treatment of the tenth preform. The SiC coating in a heating portion of the muffle tube was completely changed and green crystal of CuCl₂ was deposited on electrodes (made of copper) of the heater in the furnace body due to corrosion with Cl₂.

Example 3

According to the present invention, a dehydrated porous glass preform was fluorine-doped in a heating apparatus as shown in Fig. 2.

The preform formed by VAD had been previously dehydrated in a quartz made muffle tube and contained SiO₂ as a main component. The preform had a diameter of 140 mm and a length of 500 mm. Details of this example were as follows:

The porous preform was inserted in the quartz made muffle tube at a temperature of 1000 °C under an atmosphere of He containing 5 % of Cl₂ at a lowering rate of 5 mm/min. for dehydration. After the dehydration, the diameter and the length of the preform were the same as those before the dehydration.

The porous preform dehydrated as in the above was inserted in a muffle tube made of the highly pure carbon having the coating of SiC. The fluorine doping was carried out at a temperature of 1370 °C under an atmosphere of He containing 3 % of SiF₄ at a lowering rate of 3 mm/min. Then, the temperature was raised to 1600 °C and the preform was vitrified under an atmosphere of He. The obtained preform had a diameter of 60 mm and a length of 300 mm. A refractive index of the glass preform was -0.34 % expressed in terms of a specific refractive index difference from quartz glass.

A silica core single mode optical fiber was produced by using the preform and the transmission loss thereof was determined. The losses were 0.31 dB/km and 0.17 dB/km at wavelengths of 1.3 μm and 1.55 μm, respectively.

No impurity was found and also no abnormal peak was observed after H₂ test (at 100 °C for 20 hours). Although temperature raising and lowering operations of the quartz made muffle tube were repeated, the muffle tube was not destroyed.

Comparative Example 2

Example 3 was repeated to fluorine-dope of the porous preform which had been dehydrated in the quartz made muffle tube and to produce an optical fiber except that a muffle tube was made of a quartz glass containing 1 ppm of copper and comprised no carbon [SiC ?] coating.

The residual water content in the produced fiber was 0.01 ppm. An absorption due to copper was present to about 1.30 μm , which was sufficiently small in comparison with that found in an optical fiber produced with the prior art technique. The absorption was 2 to 3 dB/km at a wavelength of 0.8 μm . However, an inner wall of the muffle tube was heavily etched, and the muffle tube had problematic corrosion resistance.

10

Comparative Example 3

(Heat resistance of quartz made muffle tube)

15

Example 3 was carried out repeatedly except that a quartz made muffle tube was used instead of the carbon made one. The muffle tube highly stretched during the vitrification treatment and it could not be used again.

20

Comparative Example 4

(Etching of quartz made muffle tube)

25

Comparative Example 3 was repeated except that SF_6 was used instead of SiF_4 . The quartz made muffle tube was heavily etched and pin holes were found in a wall of the muffle tube near the heater. The glass preform contained water as much as in the order of some ppm. The stretch of the muffle tube was of course in remarkable extent and the muffle tube could not be used again.

30

Example 4

Twenty glass preforms for an optical fiber were treated by using a heating furnace as shown in Fig. 2. The furnace comprised a carbon made muffle tube having the SiC coating in a thickness of 60 μm . The atmosphere of the treatment was $\text{SiF}_4/\text{Si}_2\text{F}_6/\text{He} = 3\%/0.3\%/96.7\%$ and the heating temperature was 1650 °C. The obtained preform had a specific refractive index difference of -0.3 % relative to quartz. After the treatment of the preforms, no degradation of the SiC coating was observed on the surface of the muffle tube.

40

Example 5

By using an apparatus as in Example 4, twenty porous fluorine-doped glass preforms was vitrified under an atmosphere of $\text{SiF}_4/\text{Si}_2\text{F}_6/\text{Si}_3\text{F}_8/\text{He} = 3\%/0.3\%/0.1\%/96.6\%$ at a temperature of 1650 °C. After the vitrifying treatment, the surface of the muffle tube was observed and no corrosion of the SiC coating was found.

45

A single mode optical fiber was produced from the obtained preform. The transmission losses of the optical fiber were 0.35 dB/km and 0.20 dB/km at wavelengths of 1.3 μm and 1.5 μm , respectively.

50

Example 6

By using an apparatus as in Example 4, fifteen fluorine-doped glass preforms were vitrified under an atmosphere of $\text{SiF}_4/\text{Si}_3\text{F}_8/\text{He} = 3\%/0.1\%/96.9\%$ at a temperature of 1650 °C. After the vitrifying treatment, the surface of the muffle tube was observed and no corrosion of the SiC coating was found.

55

A single mode optical fiber was produced from the obtained preform. The transmission losses of the optical fiber were 0.33 dB/km and 0.20 dB/km at wavelengths of 1.3 μm and 1.5 μm (not Fig. 8 but just like

(quite similar to) Fig. 8), respectively.

Comparative Example 5

5

When a carbon made muffle tube having a SiC coating in a thickness of 60 μm in a heating apparatus as shown in Fig. 2 was kept at a temperature of 1550 °C under an atmosphere of He containing 5 % of SiF₄ for ten hours, the SiC coating was fully volatilized.

10

Example 7

A carbon made muffle tube having an inner coating of the highly pure silicon carbide in a thickness of 50 μm formed by the CVD method was heated at a temperature of 1400 °C under an atmosphere of 160 ml/min. of SiF₄ and 10 l/min. of He. A porous glass preform was inserted in the muffle tube at a lowering rate of 3 mm/min. After the preform was passed along a side portion of the heater, the atmosphere gas was changed to 10 l/min. of He and the heater temperature was raised to 1650 °C. The preform was again passed along the side portion of the heater at a rate of 15 mm/min.

The obtained preform had a refractive index difference of -0.33 % relative to quartz. A single mode optical fiber having a diameter of 125 μm was produced from the preform. The residual water content of the optical fiber was 0.02 ppm and no increase of the transmission loss due to, for example, copper and iron was observed.

By using the same muffle tube, fifty glass preforms were treated. Although the inner SiC coating was reduced by 5 μm in a thickness, no increase of the transmission loss was observed.

25

Comparative Example 6

Example 7 was repeated except that the carbon made muffle tube did not have the highly pure silicon carbide coating. SiF₄ highly leaked through a wall of the muffle to the outside and a concentration of HF near the muffle tube was increased to 1 to 5 ppm. The obtained preform had a water content of 1.5 ppm.

Example 8

35

A porous glass preform was purified in a quartz made muffle tube at a temperature of 1100 °C under an atmosphere of Cl₂/He = 0.3/10 by volume. Then, the preform was vitrified at a temperature of 1350 °C under an atmosphere of 100 % of SiF₄ and then at a temperature of 1500 °C and at an atmosphere of 100 % of He in a muffle tube having an inner SiC coating in thickness of 50 μm formed by the CVD method. The obtained preform had a specific refractive index difference of -0.68 % relative to quartz.

A pure silica core single mode optical fiber having a diameter of 125 μm was produced from the preform. The transmission loss of the optical fiber was 0.23 dB/km at a wavelength of 1.55 μm .

Example 9

45

An apparatus comprising a carbon made muffle tube as shown in Fig. 7 was used. The muffle tube had silicon carbide coatings (purity 100 %) formed by the CVD method on an inner and an outer surfaces. A glass preform 21 was inserted in the front chamber 71, the top cover was closed and the front chamber interior was replaced with nitrogen gas. Then, the preform was inserted in the muffle tube 23 after the partition means 76 was opened, and the partition means was closed. The preform was fluorine-doped as in Example 7.

When the preform was removed from the muffle tube, following procedures were carried out: The muffle tube interior was replaced with N₂ gas, the partition means was opened, the preform was lifted in the front chamber, the partition means was closed, and then the top cover was opened to remove the preform from the front chamber.

55

Seventy preforms were treated in accordance with the above procedures in one and a half months. A silica core single mode optical fiber having a diameter of 125 μm was produced from the obtained preform.

An average transmission loss of the optical fiber was 0.180 dB/km at a wavelength of 1.55 μm .

Comparative Example 7

By using a heating furnace as shown in Fig. 2, forty-five preforms were thermally treated in one month. The muffle tube had an outer and an inner coatings of silicon carbide each having a thickness of 50 μm formed by the CVD method (purity 100 %). The preform was treated at a temperature of 1350 °C under an atmosphere of a SiF_4 containing gas.

A silica core single mode fiber was produced from each obtained preform. An average transmission loss of the optical fibers produced from the first preform to the thirtieth preform was 0.183 dB/km at a wavelength of 1.55 μm . An average transmission loss of the optical fibers produced from the thirty-first preform to the last preform was as rather large as 0.195 dB/km at a wavelength of 1.55 μm .

A sodium content in the preform was measured by atomic-absorption spectroscopy. The Na content was less than 20 ppb by weight in the tenth preform, and 150 to 200 ppb by weight in the last preform. This may be because of entry of dusts in the air around the muffle tube.

Therefore, when the apparatus comprising the front chamber is used, the better preform can be stably formed for a long period.

Example 10

A heating furnace as shown in Fig. 2 was used. The muffle tube in the furnace had an outer and an inner coatings of silicon carbide (purity 100 %) formed by the CVD method each having a thickness of 50 μm . A porous glass preform was heated at a temperature of 1050 °C under an atmosphere gas of 300 cc/min. of SiCl_4 and 10 l/min. of He at a lowering rate of 10 mm/min. After the preform was passed along a side portion of the heater, the atmosphere gas was changed to 160 cc/min. of SiF_4 and 10 l/min. of He and the heater temperature was raised to 1400 °C. The preform was again passed along the side portion of the heater at a rate of 3 mm/min. Then, the gas was changed to 10 l/min. of He and the heater temperature was raised to 1700 °C. The preform was moved at a rate of 20 mm/min. to be vitrified.

The obtained preform had a specific refractive index difference of -0.32 % relative to quartz. A pure silica core single mode optical fiber having a diameter of 125 μm was produced from the preform. The transmission loss of the fiber was 0.178 dB/km at a wavelength of 1.55 μm .

Example 11

By using the same apparatus as in Example 10, a glass preform consisting of a silica core containing 10 % of GeO_2 and a cladding of pure silica was thermally treated for dehydration and vitrification.

An optical fiber having a diameter of 125 μm was produced from the obtained preform. The transmission loss of the fiber was 0.35 dB/km at a wavelength of 1.3 μm .

Example 12

In a heating furnace as shown in Fig. 3, a carbon tube 31 having a silicon carbide coating (purity 100 %) on its surface was used as an inserted member in a muffle tube 23. The coating was 50 μm in thickness and formed by the CVD method. An impurity content of the member was less than 15 ppm by weight.

SiF_4 and He were supplied in the muffle tube at rates of 160 cc/min. and 10 l/min., respectively. 20 l/min. of N_2 was introduced in the annular space between the muffle tube and the member. The muffle tube was heated to a temperature of 1400 °C and a porous preform 21 was passed along a side portion of the heater 24 at a lowering rate of 3 mm/min. to be fluorine-doped.

Then, the muffle tube was heated to a temperature of 1650 °C and the gas to be supplied in the muffle tube was changed to 10 l/min. of He. The gas to be supplied in the annular space remained unchanged. The preform was again passed along the side portion of the heater at a lowering rate of 15 mm/min. to be vitrified.

A pure silica core single mode optical fiber having a diameter of 125 μm was produced from the preform. The transmission loss of the fiber was 0.178 to 0.181 dB/km at a wavelength of 1.55 μm .

Example 13

A heating furnace as shown in Fig. 2 was used. A muffle tube in the furnace had an outer and an inner coatings of the high purity silicon carbide (purity 100 %) formed by the CVD method each having a thickness of 50 μm . As in Example 12, seventy preforms were treated.

A pure silica core single mode optical fiber having a diameter of 125 μm was produced from each preform. The transmission loss of the optical fiber highly scattered in the range of 0.182 to 0.195 dB/km at a wave length of 1.55 μm .

As explained with reference to Examples and Comparative Examples, when the muffle tube having the coating of SiC is used in accordance with the present process, the preform for the optical fiber having substantially no water and substantially no impurity can be stably formed so that the optical fiber having a less transmission loss can be drawn from such preform.

In addition, since the muffle tube does not destroy due to the temperature lowering operation in comparison with the conventional quartz made muffle tube, the muffle tube can be economically and stably used for a long period.

Claims

1. A process for the dehydrating and purifying treatment by heating a porous glass preform for an optical fiber comprising passing the porous glass preform through a muffle tube having a SiC layer at least on its inner surface at a high temperature under an atmosphere comprising an inert gas and a silicon halogenide gas.
2. The process according to claim 1, wherein the silicon halogenide gas is SiCl_4 .
3. The process according to claim 1, wherein the atmosphere gas further comprises a halogen based gas.
4. The process according to claim 3, wherein the halogen based gas is Cl_2 .
5. The process according to claim 1, wherein a volume ratio of the silicon halogenide is 0.3 to 10 parts by volume to 100 parts by volume of the inert gas.
6. The process according to claim 3, wherein a volume ratios of the halogen based gas and the silicon halogenide gas are 0.1 to 10 parts and 0.3 to 10 parts to 100 parts of the inert gas, respectively.
7. The process according to claim 1, wherein a heating temperature of the preform is in the range of 800 to 1200 $^{\circ}\text{C}$.
8. The process according to claim 1, wherein the SiC layer has a purity expressed in terms of a total ash content of not more than 50 ppm.
9. The process according to claim 1, wherein the muffle tube further has a SiC layer on its outer surface.
10. The process according to claim 1, wherein the SiC layer is formed with a method selected from the group consisting of PCVD coating method and CVD coating method.
11. The process according to claim 1, the SiC layer has a thickness of not less than 1 μm .
12. A process for the fluorine-doping treatment by heating a porous glass preform for an optical fiber comprising passing a porous glass preform through a muffle tube having a SiC layer at least on its inner surface at a high temperature under an atmosphere comprising a fluorine compound gas and an inert gas.
13. The process according to claim 12, wherein the preform has been dehydrated and purified in accordance with any one of the processes according to claims 1 to 11.
14. The process according to claim 12, wherein the fluorine compound gas is a silicon fluoride.
15. The process according to claim 14, wherein the silicon fluoride is SiF_4 .
16. The process according to claim 12, wherein the fluorine compound gas is a carbon fluoride.
17. The process according to claim 16, wherein the carbon fluoride is at least one selected from the group consisting of CF_4 and C_2F_6 .
18. The process according to claim 12, wherein a heating temperature of the preform is in the range of 1200 to 1400 $^{\circ}\text{C}$.
19. The process according to claim 12, wherein the SiC layer has a purity expressed in terms of a total ash content of not more than 50 ppm.
20. The process according to claim 12, wherein the muffle tube further has a SiC layer on its outer surface.
21. The process according to claim 12, wherein the SiC layer is formed with a method selected from the group consisting of PCVD coating method and CVD coating method.
22. The process according to claim 12, the SiC layer has a thickness of not less than 1 μm .
23. A process for the vitrifying treatment by heating a porous glass preform for an optical fiber comprising passing the preform, which has been previously dehydrated and purified, through a muffle tube having a

SiC layer at least on its inner surface at a high temperature under an atmosphere gas.

24. The process according to claim 23, wherein the preform has been dehydrated and purified in a quartz made muffle tube.

25. The process according to claim 24, wherein the preform has been dehydrated and purified at a temperature of not more than 1100 °C.

26. The process according to claim 23, wherein the preform has been dehydrated and purified in accordance with any one of the processes according to claims 1 to 11.

27. The process according to claim 26, wherein the atmosphere gas comprises at least one selected from the group consisting of Si₂F₆ and Si₃F₈.

28. The process according to claim 23, wherein the SiC layer has a purity expressed in terms of a total ash content of not more than 50 ppm.

29. The process according to claim 23, wherein the muffle tube further has a SiC layer on its outer surface.

30. The process according to claim 123, wherein the SiC layer is formed with a method selected from the group consisting of PCVD coating method and CVD coating method.

31. The process according to claim 23, the SiC layer has a thickness of not less than 1 μm.

20

25

30

35

40

45

50

55

Fig. 1

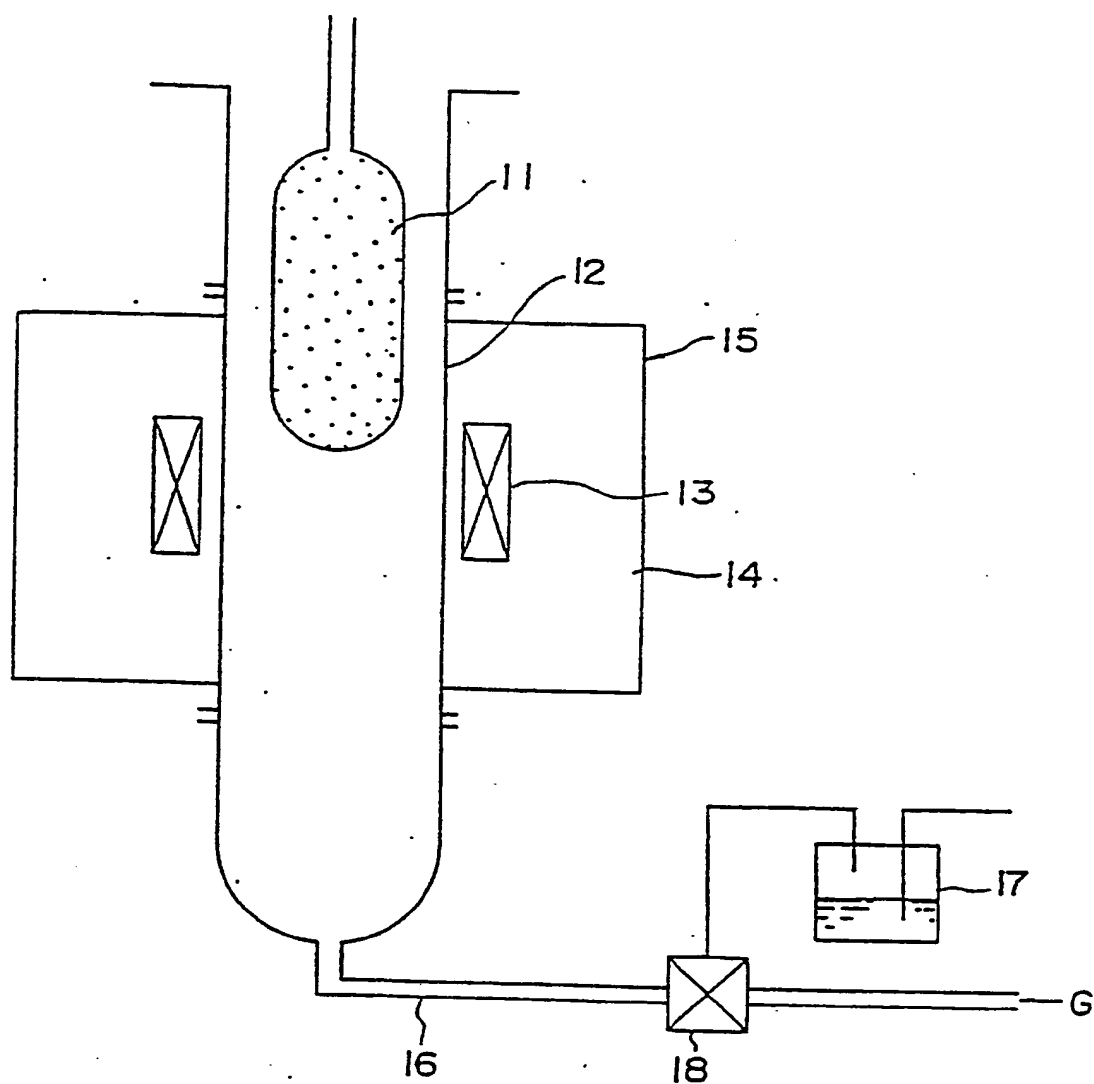


Fig. 2

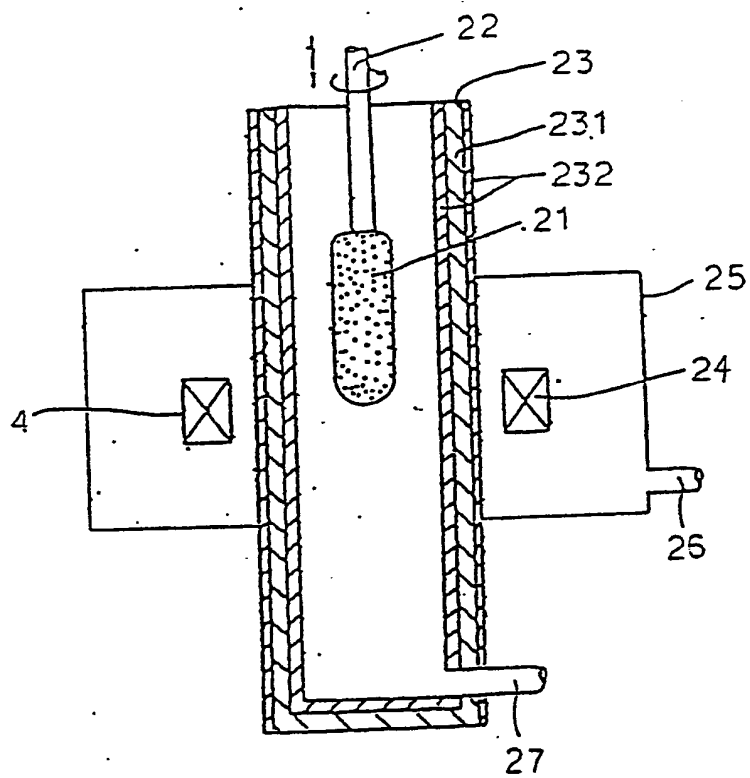


Fig. 3

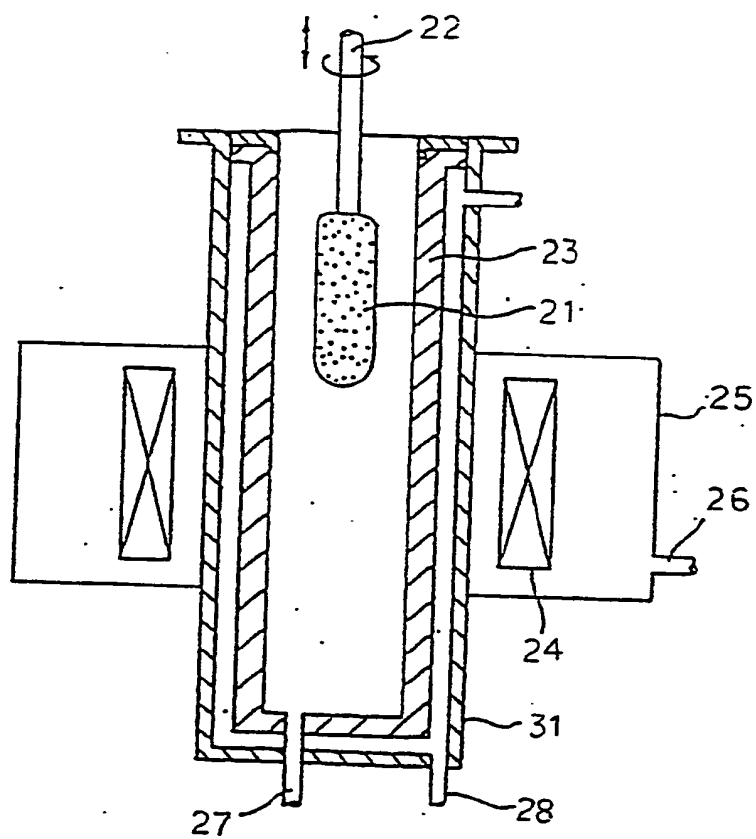


Fig. 4

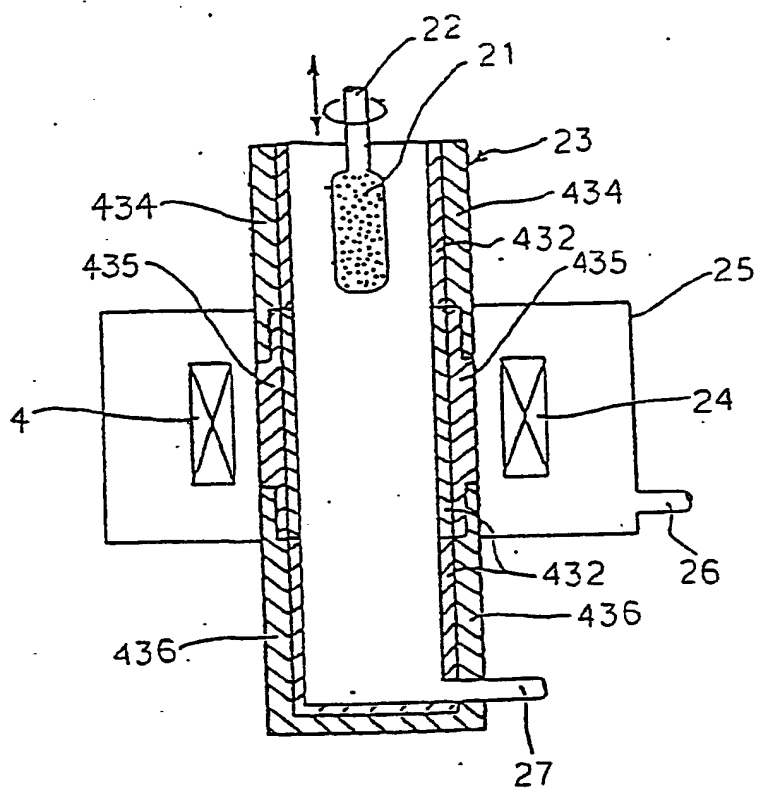


Fig. 5

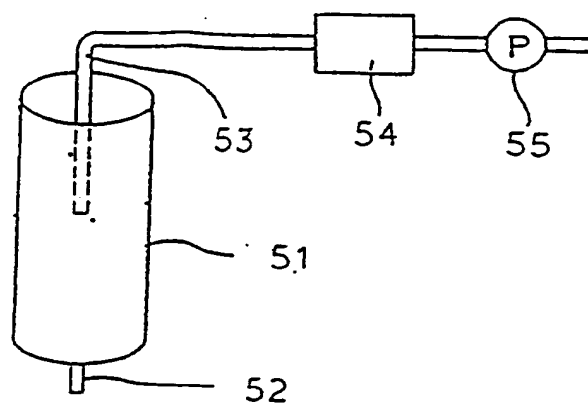


Fig. 6

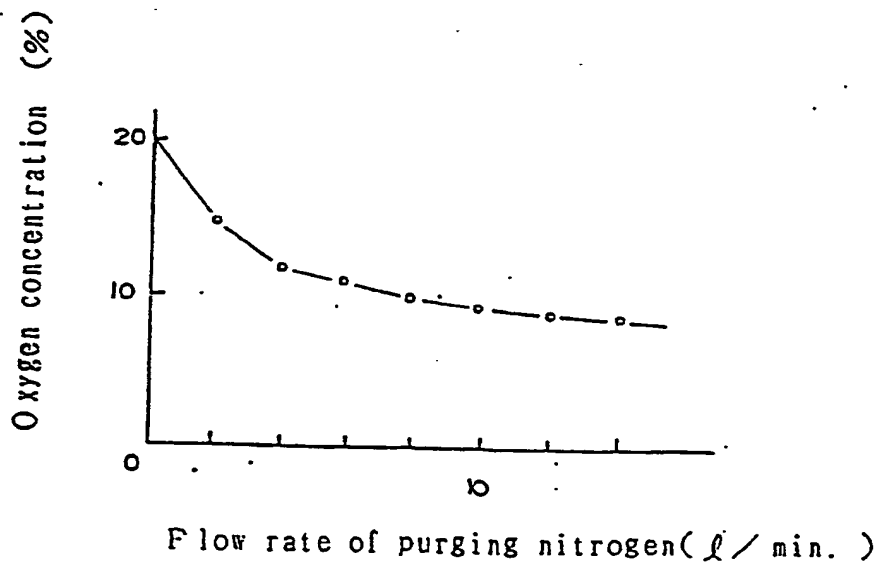


Fig. 7


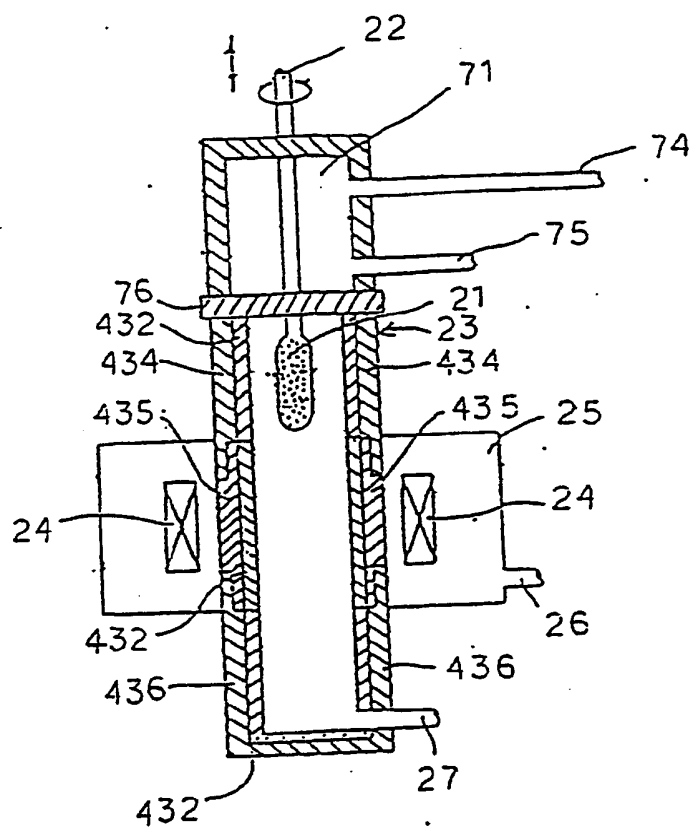


Fig. 8

Transmission loss of optical fibers



(19)

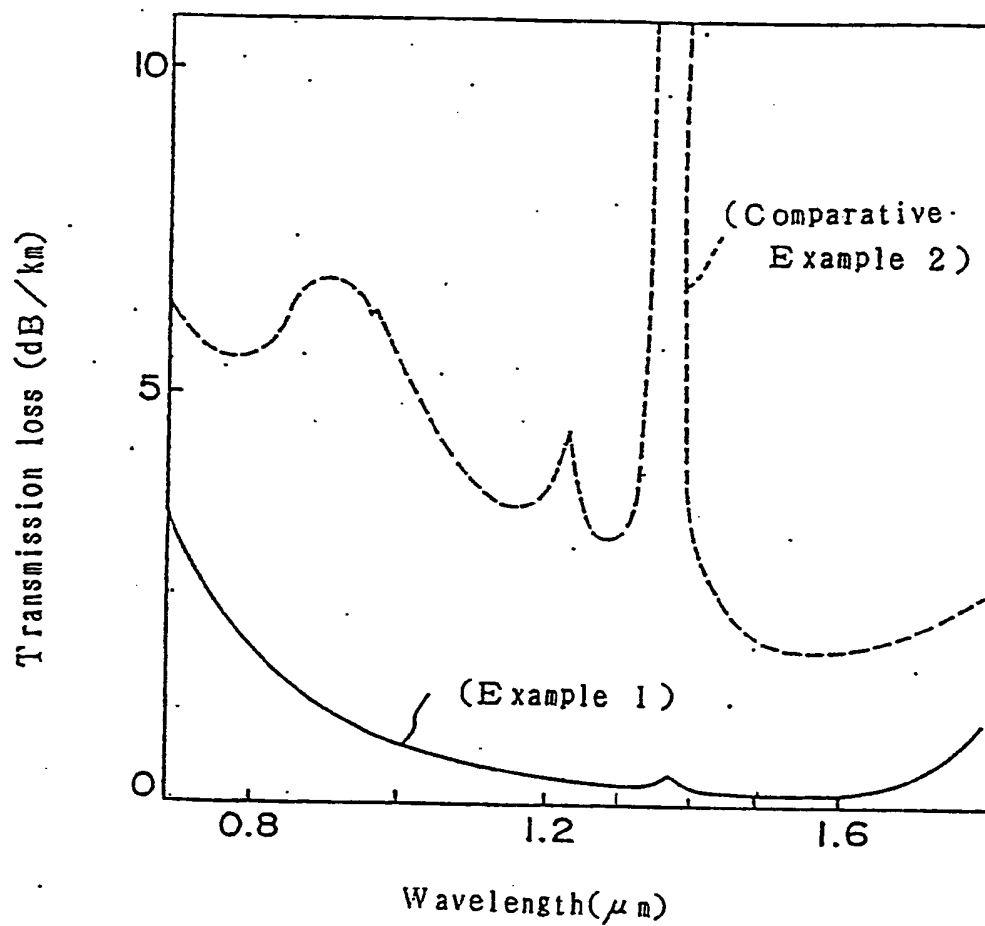

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 405 580 A3

(12)

EUROPEAN PATENT APPLICATION(21) Application number: **90112460.2**(51) Int. Cl.⁵: **C03B 37/012**(22) Date of filing: **29.06.90**(30) Priority: **29.06.89 JP 167695/89**(43) Date of publication of application:
02.01.91 Bulletin 91/01(64) Designated Contracting States:
DE DK ES FR GB IT SE(68) Date of deferred publication of the search report:
06.02.91 Bulletin 91/06(71) Applicant: **SUMITOMO ELECTRIC INDUSTRIES, LTD.**
5-33, Kitahama 4-chome, Chuo-ku
Osaka-shi, Osaka 541(JP)(72) Inventor: **Ishikawa, Shinji, C/o Yokohama Work**
Sumitomo Electric Ind., Ltd., 1, Taya-cho
Sakae-ku
Yokohama-shi, Kanagawa-ken(JP)
Inventor: **Ohga, Yuichi, C/o Yokohama Work**
Sumitomo Electric Ind., Ltd., 1, Taya-cho
Sakae-ku
Yokohama-shi, Kanagawa-ken(JP)

Inventor: **Tsuchiya, Ichiro, c/o Yokohama Work**
Sumitomo Electric Ind., Ltd., 1, Taya-cho
Sakae-ku
Yokohama-shi, Kanagawa-ken(JP)
Inventor: **Kanamori, Hiroo, C/o Yokohama Work**
Sumitomo Electric Ind., Ltd., 1, Taya-cho
Sakae-ku
Yokohama-shi, Kanagawa-ken(JP)
Inventor: **Kyoto, Michihisa, C/o Yokohama Work**
Sumitomo Electric Ind., Ltd., 1, Taya-cho
Sakae-ku
Yokohama-shi, Kanagawa-ken(JP)

(74) Representative: **Hansen, Bernd, Dr.**
Dipl.-Chem. et al
Hoffmann, Eitle & Partner Patent- und
Rechtsanwälte Arabellastrasse 4e 4
D-8000 München 81(DE)(54) **Process for thermal treatment of glass fiber preform.**

(57) The present invention provides
a process for the dehydrating and purifying treatment by heating a porous glass preform for an optical fiber comprising passing the porous glass preform through a muffle tube having a SiC layer at least on its inner surface at a high temperature under an atmosphere comprising an inert gas and a silicon halogenide gas;
a process for the fluorine-doping treatment by heating a porous glass preform for an optical fiber comprising passing a porous glass preform through a muffle tube having a SiC layer at least on its inner surface at a high temperature under an atmosphere comprising a fluorine compound gas and an inert gas; and

a process for the vitrifying treatment by heating a porous glass preform for an optical fiber comprising passing the preform, which has been previously dehydrated and purified, through a muffle tube having a SiC layer at least on its inner surface at a high temperature under an atmosphere gas.

EP 0 405 580 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

DOCUMENTS CONSIDERED TO BE RELEVANT			EP 90112460.2
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CL5)
X	<u>EP - A1 - 0 302 121</u> (SUMITOMO ELECTRIC INDUSTRIES LIMITED) * Claims 1-5, 8, 9, 16, 19-21; page 12, lines 4-6; page 17, lines 16-21; page 20, experiment 10; page 36, lines 13-21 *	1, 3, 4, 7, 9, 10, 12-18, 20, 21, 23-27, 29, 30	C 03 B 37/012
X	<u>EP - A2/A3 - 0 161 680</u> (SUMITOMO ELECTRIC INDUSTRIES LIMITED) * Claims; page 19, lines 12-22; page 20, lines 6-17 *	12-18	
X	<u>EP - A2/A3 - 0 201 937</u> (SUMITOMO ELECTRIC INDUSTRIES LIMITED) * Claims; page 6, lines 2-8 *	12-18	
D, A	PATENT ABSTRACTS OF JAPAN, unexamined applications, C field, vol. 11, no. 30, January 29, 1987 THE PATENT OFFICE JAPANESE GOVERNMENT page 108 C 400 * Kokai-no. 61-201 634 (SUMI-TOMO ELECTRIC IND. LTD) *	1, 10, 11	TECHNICAL FIELDS SEARCHED (Int. CL5) C 03 B
The present search report has been drawn up for all claims			
Place of search VIENNA		Date of completion of the search 04-12-1990	Examiner HAUSWIRTH
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EP 90112460.2 (1990)